

BP21P4BC Tech Sheet

Customer: **Balboa Water Group**

Part Number: 56626-03 825 Incoloy 3kW
56627-03 Titanium 3kW

Custom Box Overlay
Box Overlay Part Number N/A

CE System Model: BP21-BP21P4BC-RCA3.0K
Software Version ID: M100_225 V65.0
Software Version: 65.0
File Name: BP2100_65.0_BP21P4BC_TP6.hex
Configuration Signature: 99DB30F1

Eng. Project Number: 5663

Control Panels:

spaTouch™3	Any version (version 3.2 or later required for Clim8zone™ heat pump support)
spaTouch™2	Any version (version 2.19 or later required for CHROMAZON3™ support; version 2.36 or later required for Clim8zone™ heat pump support)
Icon spaTouch™	Any version (version 3.36 or later required for bba™2 fully integrated functionality)
Menued spaTouch™	Any version (version 2.8 or later required for bba™2 integrated functionality)
TP900	Version 3.1 and later (Version 3.13 or later required for bba™)
TP800	Version 3.1 and later (Version 3.13 or later required for bba™; version 4.11 or later required for bba™2 integrated functionality)
TP700	Any version
TP600	Version 2.7 and later (Version 2.12 or later required for bba™/bba™2 On/Off control via menu)



Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2012 Balboa Water Group.

System Revision History

Part #	EPN	Date	Originator	Changes Made
ZT000084	4248	04-10-14	BWG	New generic BP2100 with 4 Pumps plus optional blower and/or Circ.
56625	4248	05-01-14	BWG	Released to production.
56626				
56627				
56625-01	4776	10-27-16	BWG	Updated to latest software version, adding topside-intergrated bba™2 support. Also added TP600 support. Released to production.
56626-01				
56627-01				
56625-02	5098	01-27-21	BWG	Redesigned BP2100 board + updated software to support CHROMAZONE™ & M8. 56625-XX (800 Incoloy version) discontinued.
56627-02				
56626-03	5663	06-09-22	BWG	Update to support Clim8zone™ heat pump. Update transformer fuse.
56627-03				

bba™2 / bba™3 (Balboa Bluetooth Amp) connection is documented separately.

bba™2 / bba™3 is integrated into graphic display panels (TP700, TP800, TP900 and spaTouch™).

With TP600, use the "BT" entry on the menu to toggle bba™2 / bba™3 power On/Off.

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.

© Copyright 2012 Balboa Water Group.

Basic Functions Setup 1-8

Power Requirements:

Single Service [3 wires (line, neutral, ground)] – RESTRICTED OPERATIONS (See page 5)
230VAC, 50/60Hz*, 1p, 32A, (Circuit Breaker rating = 40A max.)

Dual Service N/A

3-Service [5 wires (line 1, line 2, line 3, neutral, ground)]
230VAC line-to-neutral**, 50/60Hz*, 3p, 16A, (Circuit Breaker rating = 20A max each phase line.)

HiPot Testing Note:

Disconnect slip terminal with green wires from J6 prior to performing HiPot test. Failure to disconnect may cause a false failure of the test. Reconnect terminal to J6 after successful completion of HiPot test.

* BP systems automatically detect 50Hz vs 60Hz. However, power frequency (50Hz vs 60Hz) is just one of many differences between North American (UL) and CE power, and it is because of these other differences that different BP systems must be used for UL vs CE territories. Also, there are a few countries that use CE power but 60 Hz (such as South Korea) which need CE systems, and a few countries that use UL power but 50 Hz which need UL systems.

** 3-phase service measured line-to-line will read about 400V, but BP systems do not use it line-to-line.

IMPORTANT - Service must include a neutral wire, with a line to neutral voltage of 230VAC.

In 3x16A Service:

Pump 2 and Blower (if any) are on one service.

Pump 3, Pump 4, and the heater are on another service.

Everything else is on the remaining service.

Basic Functions Setup 1-8

System Outputs:

Pump 1	230VAC	2-Speed 1-Speed in Setups 4 & 5	11A max* 15-minute timer for High Speed, 15-Minute timer for Low Speed
This is the heater pump in Setups 6-8 Must deliver 20 GPM through heater			
Pump 2	230VAC	2-Speed 1-Speed in Setups 2-5, 7-8	11A max* 15-minute timer
Pump 3	230VAC	1-Speed	8A max* 15-minute timer
Pump 4	230VAC	1-Speed	8A max* 15-minute timer
Blower	230VAC	1 Speed	5A max* 15-minute timer Unused in Setups 1, 3, 5, 6 & 8
Circ Pump	230VAC	1-Speed	2A max* Programmable Filtration Cycles + Polling This is the heater pump in Setups 1-5 Must deliver 20 GPM through heater
Ozone	230VAC	.5A max*	Slaved to Circ Pump in Setups 1-5 Independent in Setups 6-8
Spa Light	10VAC	On/Off	2A*** max 240-minute timer.
AV + C8Z**	230VAC	Hot	2A*+8A max Always on
Heater	3.0kW @ 240VAC	max	

* These are individual maximums but depending on the electrical services they may need to be reduced. See restrictions on next page.

** 2A max limit is shared by On/Off Spa Light and CHROMAZONE™.

*** Optional splitter PN 22934 can be used to connect two things, such as an audio device and Clim8zone™(C8Z), to J33.

Basic Functions Setup 1-8

Restrictions:

In 3x16A, all equipment (if within the individual maximums listed on page 4) can run together, except the heater turns off with any high-speed pump or blower. (DIP switch A5 must be OFF.)

In 1x32A, DIP switch A5 must be ON. With DIP Switch A5 ON, only 3 pumps (any 3 pumps) can be ON at high speed at any one time, and the blower will not run when 3 pumps are ON at high speed.

In 1x40A, with DIP switch A5 ON, it works just like at 1x32A.


To be able to use 1x40A with DIP switch A5 OFF (ie, no restrictions except for the heater), all the 230V equipment used in the spa (except for the heater) must add up to no more than 39.5 Amps. This means all 4 pumps, the blower (if any), the circ pump (if any), the ozone, and A/V (if any). (There is 0.5 Amps at 230V reserved for board and panel power as well as 10V equipment including the spa lights. That is why the 230V equipment must add up to 39.5 Amps rather than 40.0 Amps.)

See this chart for some 1x40A examples:

Pump 1	11A	11A	8.5A
Pump 2	11A	11A	8.5A
Pump 3	8A	8A	7.5A
Pump 4	8A	8A	7.5A
Blower	3A	None	3A
Circ	2A	None	2A
Ozone	0.5A	0.5A	0.5A
A/V	None	None	2A
Total	42.5A	38.5A	39.5A
Will it work?	No	Yes	Yes

Hardware Setup

Wiring Diagram

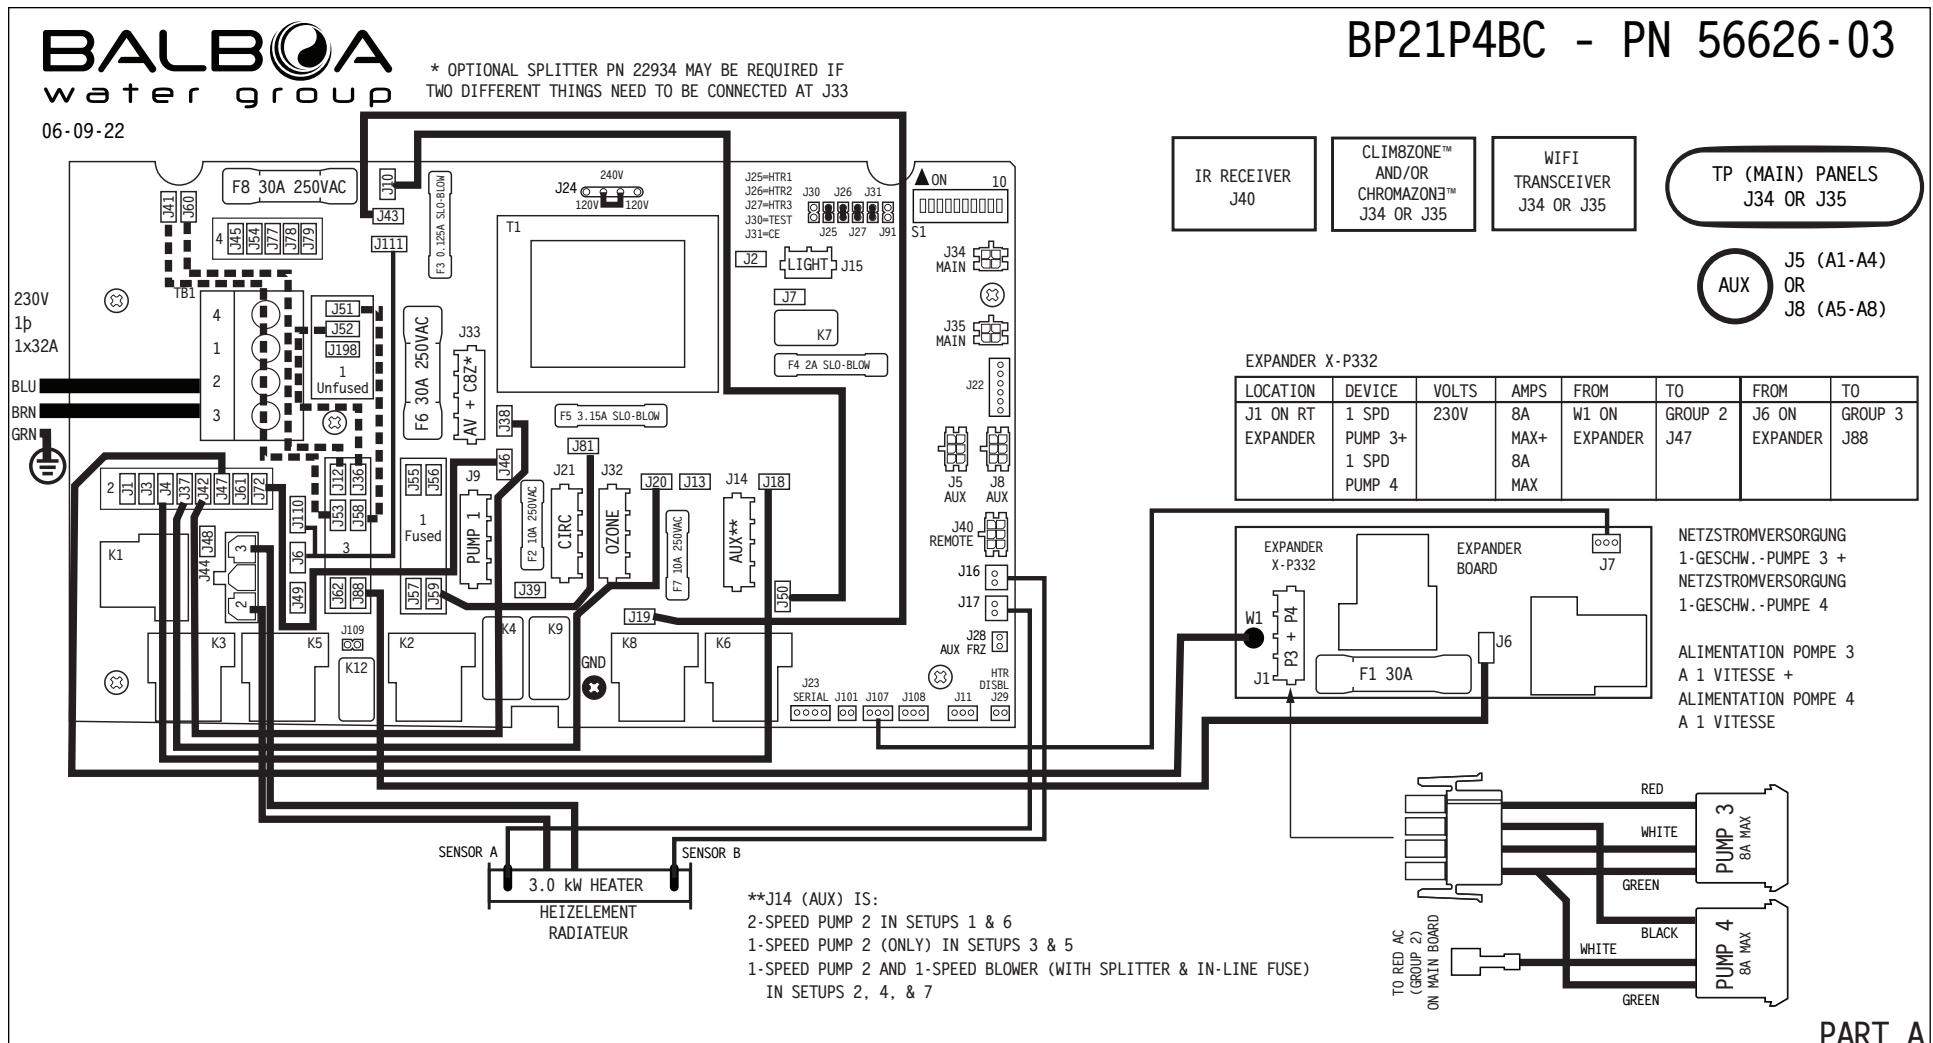

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.

© Copyright 2012 Balboa Water Group.

Hardware Setup

Settings

SINGLE SERVICE 230V 1p / 1x32A, THREE-SERVICE 230V 3p / 3x16A

LOCATION	DEVICE	MAX AMPS
J9	NETZSTROMVERSORGUNG 2-GESCHW.-PUMPE 1 ALIMENTATION POMPE 1 A 2 VITESSES 2-SPD PUMP 1	11A
J14	2/1-SPD PUMP 2 + BLOWER NETZSTROMVERSORGUNG 2/1-GESCHW.-PUMPE 2 + SPRUDELGEBLASE ALIMENTATION POMPE 2 A 2/1 VITESSES + VENTILATEUR	11A + 5A
J15	10V BELEUCHTUNG ECLAIRAGE BAIN HYDRO SPA LIGHT	2A* (@10V)
J21	KREISLAUF PUMPE POMPE DE CIRCULATION CIRC PUMP	2A
J32	OZONGENERATOR GENERATOR OZONE OZONE GENERATOR	0.5A
J33	AV + CLIM8ZONE™ (C8Z)	2A + 8A
J44	HEATER	3.0kW

* 2A LIMIT IS SHARED BY J15 SPA LIGHT AND CHROMAZONE™

SETUP #	CIRC PUMP	PUMP 1	PUMP 2	PUMP 3	PUMP 4	BLOWER	TEMP SCALE
1	PROGRAMMABLE FILTRATION + POLLING	2-SPEED	2-SPEED	1-SPEED	1-SPEED	NONE	°C
2	PROGRAMMABLE FILTRATION + POLLING	2-SPEED	1-SPEED	1-SPEED	1-SPEED	1-SPEED	°C
3	PROGRAMMABLE FILTRATION + POLLING	2-SPEED	1-SPEED	1-SPEED	1-SPEED	NONE	°C
4	PROGRAMMABLE FILTRATION + POLLING	1-SPEED	1-SPEED	1-SPEED	1-SPEED	1-SPEED	°C
5	PROGRAMMABLE FILTRATION + POLLING	1-SPEED	1-SPEED	1-SPEED	1-SPEED	NONE	°C
6	NONE	2-SPEED	2-SPEED	1-SPEED	1-SPEED	NONE	°C
7	NONE	2-SPEED	1-SPEED	1-SPEED	1-SPEED	1-SPEED	°C
8	NONE	2-SPEED	1-SPEED	1-SPEED	1-SPEED	NONE	°C


INSTEAD OF
SETUP #5,
THIS SYSTEM IS
CONFIGURED IN
SETUP #:



TORQUE RANGE FOR
MAIN TERMINAL BLOCK (TB1):
27-30 IN. LBS.
(31.1-34.5 kg cm)

FOR SUPPLY CONNECTIONS,
USE CONDUCTORS SIZED ON THE
BASIS OF 60°C AMPACITY BUT
RATED MINIMUM OF 90°C.

USE COPPER CONDUCTORS ONLY.
EMPLOYER UNIQUEMENT
DES CONDUCTEURS DE CUIVRE.

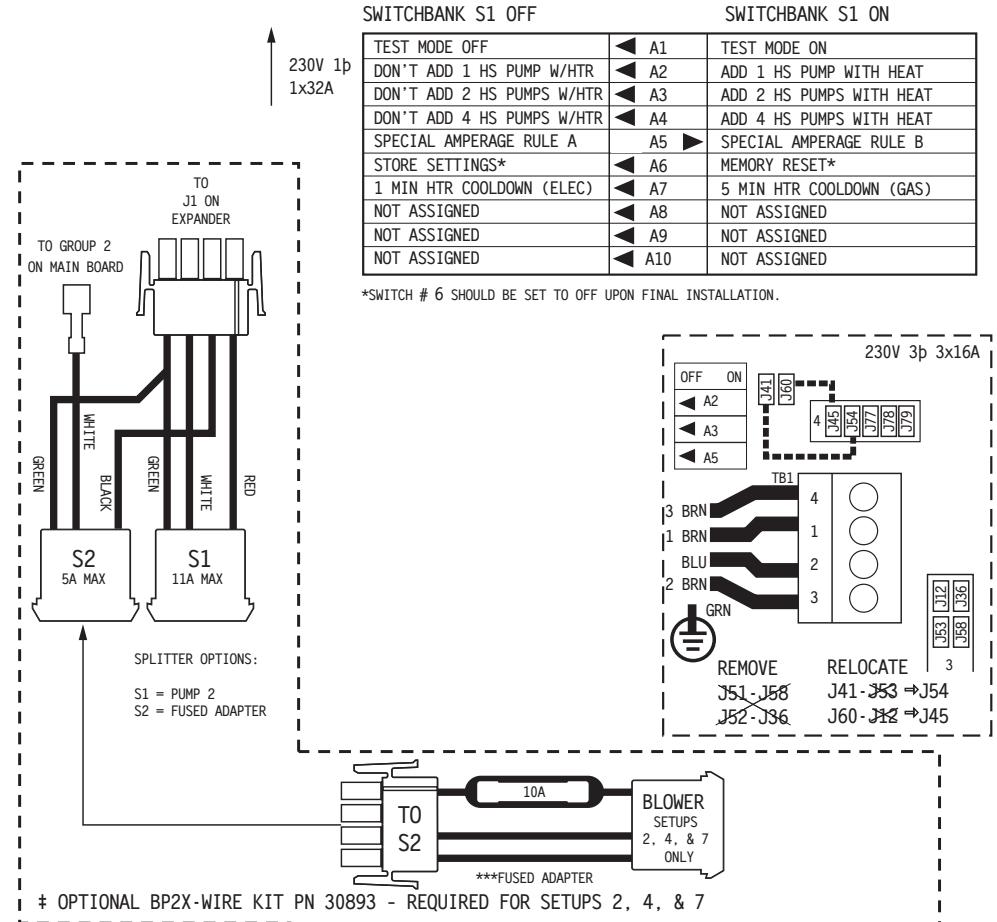

06-09-22

BP21P4BC - PN 56626-03

PART B

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2,
Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.
© Copyright 2012 Balboa Water Group.

Setup Reference Table

Setup #	Circ Pump	Pump 1	Pump 2	Pump 3	Pump 4	Blower	Temp Scale
1	Programmable Filtration + Polling	2-Speed	2-Speed	1-Speed	1-Speed	None	°C
2	Programmable Filtration + Polling	2-Speed	1-Speed	1-Speed	1-Speed	1-Speed	°C
3	Programmable Filtration + Polling	2-Speed	1-Speed	1-Speed	1-Speed	None	°C
4	Programmable Filtration + Polling	1-Speed	1-Speed	1-Speed	1-Speed	1-Speed	°C
5	Programmable Filtration + Polling	1-Speed	1-Speed	1-Speed	1-Speed	None	°C
6	None	2-Speed	2-Speed	1-Speed	1-Speed	None	°C
7	None	2-Speed	1-Speed	1-Speed	1-Speed	1-Speed	°C
8	None	2-Speed	1-Speed	1-Speed	1-Speed	None	°C

**System (and any replacement board)
is shipped in Setup 5**

Color Key	Output
Blue	XP332 and Splitter
Green	J14 (Aux) and splitter and in-line Blower fuse
Yellow	J14 (Aux) on Main Board

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.

© Copyright 2012 Balboa Water Group.

Changing Software Setups with spaTouch™ Icon-Driven Panels

Test Menu Access (S1, Switch 1 ON) Service Technician ONLY.

DANGER! HIGH VOLTAGE WILL BE ACCESSIBLE! SERVICE TECHNICIAN ONLY!


While the system is running, move DIP Switch 1 (on S1 on the Main circuit board) to ON.

The system will enter Test Mode.





Moving DIP Switch 1 to OFF will exit Test Mode.

To Change Software Setups:

While in Test Mode, press the indicated icons to move from screen to screen.

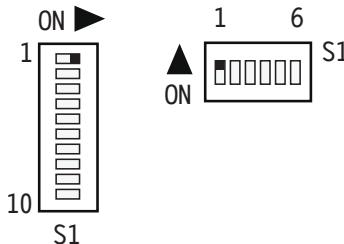


The example screens shown here are from the spaTouch 1 Icon-Driven Panel, but the screens on the spaTouch 2 Panel are similar. The main difference is that the spaTouch 2 display is wider.

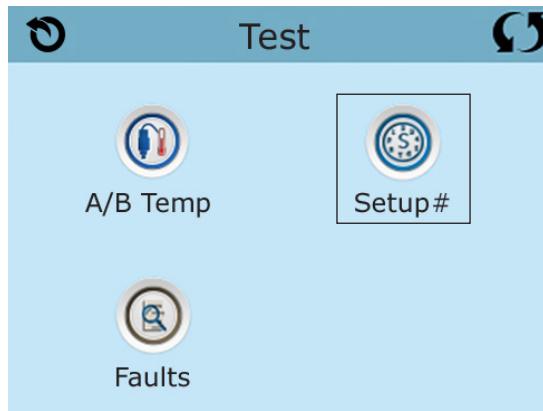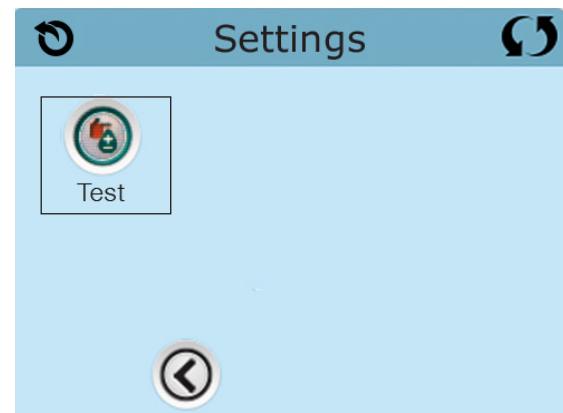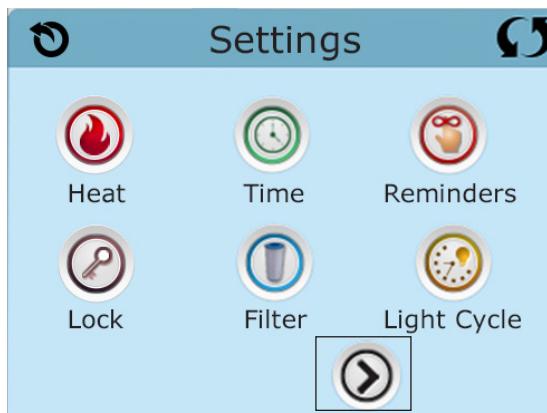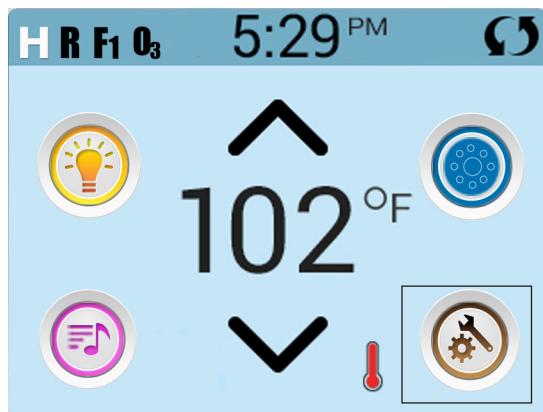

Once on the Setup Selection screen, press the Up or Down icon to select the desired Setup Number, then press the Check Mark icon to confirm and to have the spa restart.

After the system restarts, you may see a message that "The settings have been reset"; this is normal after changing Setups with DIP Switch 6 in the OFF position. Press "Clear" to dismiss this message.

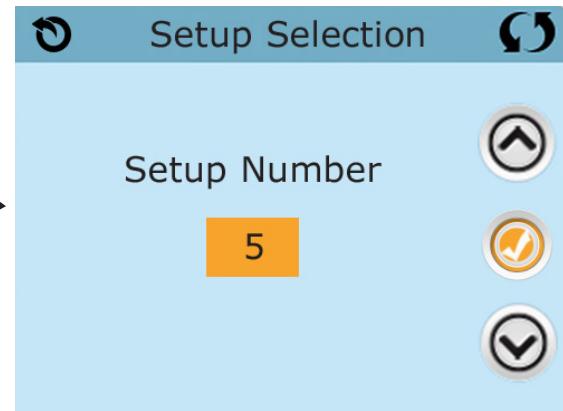

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.

© Copyright 2012 Balboa Water Group.

Changing Software Setups with TP800 / TP900 / spaTouch™ Menedu Panel


Test Menu Access (S1, Switch 1 ON) Service Technician ONLY.

DANGER! HIGH VOLTAGE WILL BE ACCESSIBLE! SERVICE TECHNICIAN ONLY!

While the system is running, move DIP Switch 1 (on S1 on the Main circuit board) to ON.


The system will enter Test Mode.

Moving DIP Switch 1 to OFF will exit Test Mode.



Software Setups

Under the TEST Menu, the Setup screen will allow changing the Setup from 1 to any number established by the Manufacturer. Changing the Setup may require wiring changes as well.

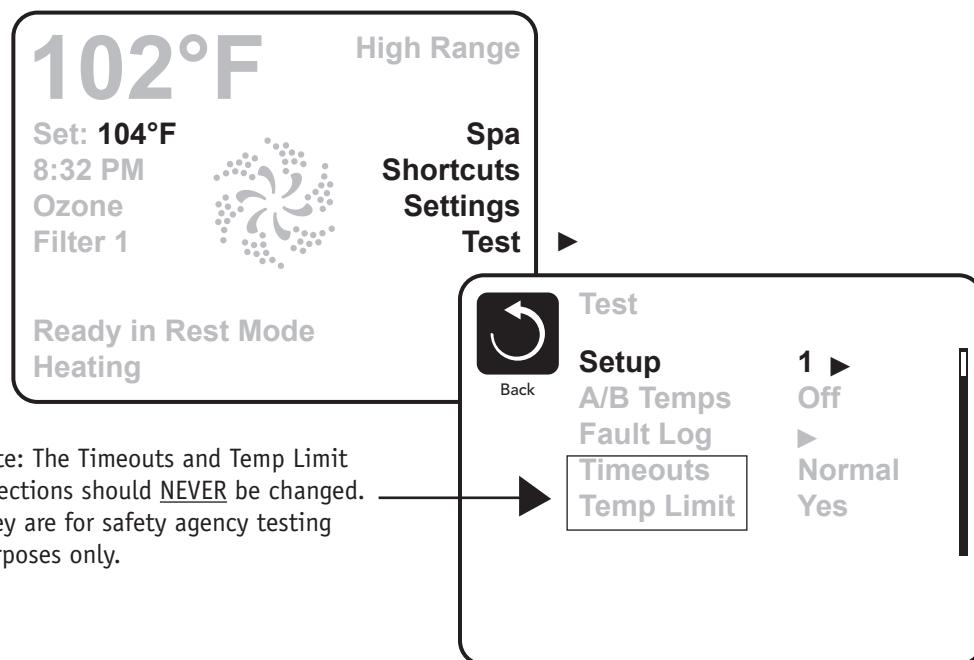

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.

© Copyright 2012 Balboa Water Group.

Changing Software Setups with TP600 / TP400

Test Menu Access (S1, Switch 1 ON) Service Technician ONLY.


DANGER! HIGH VOLTAGE WILL BE ACCESSIBLE! SERVICE TECHNICIAN ONLY!

While the system is running, move DIP Switch 1 (on S1 on the Main circuit board) to ON.

The system will enter Test Mode.

Moving DIP Switch 1 to OFF will exit Test Mode.

As soon as Switch #1 is placed in the ON position, the temperature will show "T" after it instead of F or C, indicating the System is in Test Mode



Software Setups

Under the TEST Menu, the Setup screen will allow changing the Setup from 1 to any number established by the Manufacturer.


Changing the Setup may require wiring changes as well.

You will have 1 minute to complete the setup change after you manually exit Priming Mode. (Once familiar with the process, the Setup change should take less than 15 seconds.)



When the panel displays RUN PMPS PURG AIR, press any Temperature button ONCE to exit Priming Mode.

You should see "---T" where the T indicates the system is in Test Mode.



Continued on Next Page.

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.

© Copyright 2012 Balboa Water Group.

Changing Software Setups with TP600 / TP400 Continued



Again, You will have 1 minute to complete the setup change after you manually exit Priming Mode.

Immediately after exiting Priming Mode, press this sequence of buttons: Warm*, Light, Warm, Warm, Warm, Warm. Continue to press Warm until the display shows the Setup Number (S-01, S-02, etc.) you want to switch to. When the correct setup number is showing, press Light once, and the system will reset, using the newly-selected Setup from that point on.

Move DIP Switch 1 to the OFF position to take the spa out of Test Mode. °F or °C will replace °T.

Using a permanent marker, write the Setup number on the Setup label mounted inside the system lid (right). This is very important to any service person in the future who may need to replace a circuit board or system and needs to change the Setup on a replacement part while in the field.

NOTE: Changing the Setup may require wiring changes as well - refer to the wiring diagram or wiring diagram addendum.

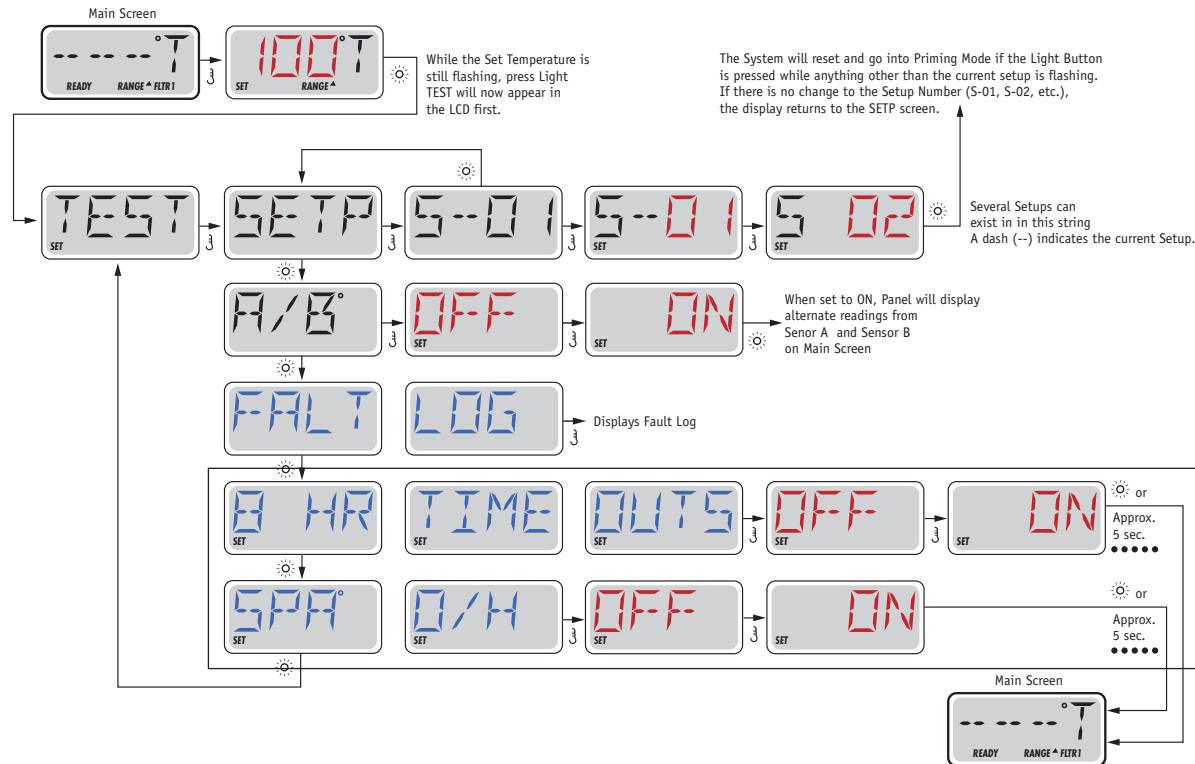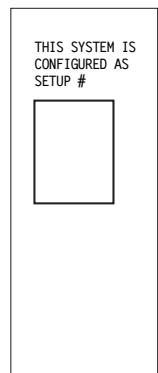

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.

© Copyright 2012 Balboa Water Group.

Equipment Expansion

Expansion Features

Control Connection


	Default	Fuse
Relay 1 (J101)	Undefined	None
Relay 7/8 (J107)	See Below 1-Speed Pump 3 And 1-Speed Pump 4 (With Splitter)	30A
Relay 9/10 (J108)	Undefined	None

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2012 Balboa Water Group.

DIP Switch Functions

Fixed-faction DIP Switches

- A1 Test Mode (normally Off).
- A2 In "ON" position, add one high-speed pump (or blower) with Heater.
- A3 In "ON" position, add two high-speed pumps (or 1 HS Pump and Blower) with Heater.
- A4 In "ON" position, add four high-speed pumps (or 3 HS Pumps and Blower) with Heater.
- A5 In "ON" position, enables Special Amperage Rule B. See Special Features section under Configuration Options for functionality with your system.
In "OFF" position, enables Special Amperage Rule A.
- A6 Persistent memory reset (Used when the spa is powering up to restore factory settings as determined by software configuration).



A2, A3, and A4 work in combination to determine the number of high-speed devices and blowers that can run before the heat is disabled. i.e. A2 and A3 in the ON position and A4 in the OFF position will allow the heater to operate with up to 3 high-speed pumps (or two HS Pumps and Blower) running at the same time. Heat is disabled when the fourth high-speed pump or blower is turned on.

Note: A2/A3/A4 all off = No heat with any high-speed pump or blower.


Assignable DIP Switches

- A7 In "ON" position, enables a 5-minute cooldown for some gas heaters (Cooling Time B).
In "OFF" position, enables a 1-minute cooldown for electric heaters (Cooling Time A).

Undesignated switches are not assigned a function.


Jumper Definitions

J109 Non Applicable on CE models



J91 Real Time Clock Enable/Disable


Note: *This Jumper should NOT be shorted when the Control Panel can display time of day.*



J30 Do Not Use

J31 Jumper on 1 pin with 2.0kW or smaller heater

Jumper on 2 pins with a 3.0kW or higher heater



J29 Heater Disable Switch Connection. If J29 is shorted by any means, the heater will not run until J29 is no longer shorted.

If J29 is shorted during power-up "J29" will appear on the panel.

The message can be dismissed with a button press, and is the only control panel notification of J29 being shorted.

No message is displayed if J29 is shorted after power-up, but the heater will not run until J29 is no longer shorted.

J29 expects a switch closure (not a voltage) as the command signal.

In some areas, a local power company may offer discounts based on voluntary "power shedding" devices that may be installed in conjunction with the spa.




J25, J26, J27 Heater Type Settings.

Note: *Factory Configured do not change.*



J24 Jumper on center two pins (230V) when heater is running at 240V.

Two Jumpers installed; one on left 2 pins and one on right 2 pins (115V) when heater is running at 120V.



Warning!

Setting DIP switches or jumpers incorrectly may cause abnormal system behavior and/or damage to system components.

Refer to Switchbank illustration on Wiring Configuration page for correct settings for this system.

Contact Balboa if you require additional configuration pages added to this tech sheet.

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.

© Copyright 2012 Balboa Water Group.

Replacement Parts

PCBA:

Main PCBA: 59538-01
Expander PCBA: 59097

HEATER(s):

Plug + Click Heater Kit: 58107R16 3.0kW 825Inc
55626R16 3.0kW Titanium
Temp Sensor Kit: 53605

CABLES:

25093 P3/P4 Adapter

FUSES:

Part Number	Amperage*	Location
30136	30A	F6, F8, F1 (Expander)
26307	2A	F4
24825	0.125A	F3
30122	10A	F2, F7
26976	3.15A	F5

* The amperages shown above are only intended for identifying fuses on our boards. They are not complete descriptions of those fuses. Please use the part numbers at the left to order fuses directly from Balboa.

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.

© Copyright 2012 Balboa Water Group.

BP2100 Configuration Options

General Features

Feature	Default
Pump 1 in Filter Cycle (Circ Only)	No
Pump 1 Low Timer	<i>15 Minutes</i>
General Pump Timer	15 Minutes
Blower Timer	15 Minutes
Mister Timer	15 Minutes
Light Timer	240 Minutes
Circ (when enabled)	Programmable + Polling
Cleanup Cycle	<i>30 Minutes</i>
Cleanup as Preference setting	<i>Yes</i>
Ozone	With Heater Pump*
Ozone Suppression	OFF
Pump Purge	60 Seconds
Blower Purge	30 Seconds
Mister Purge	5 Seconds
Purge Type	Serial - Pumps at lowest speed

* The heater Pump can be either a Circ Pump or Pump 1 Low.

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.

© Copyright 2012 Balboa Water Group.

BP2100 Configuration Options

Temperature Features

Feature Default

Temperature Display

All temperatures must be specified in °F. The system converts °F to °C dynamically. If Celsius is required for default settings, choose a desired °C value that (after rounding) corresponds to a Fahrenheit value.

°C	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
°F	39	41	43	45	46	48	50	52	54	55	57	59	61	63	64	66	68	70	72
°C	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
°F	73	75	77	79	81	82	84	86	88	90	91	93	95	97	99	100	102	104	

Hi-Range Min. Set Temp	80°F
Hi-Range Max. Set Temp	104°F
Hi-Range Default Temp*	100°F
Lo-Range Min. Set Temp	50°F
Lo-Range Max. Set Temp	99°F
Lo-Range Default Temp*	70°F
Freeze Threshold	44°F
Freeze Type	Rotating - Pumps at Lowest Speed
Temp Lock Type	Temp + Settings

**May be changed by end-user (if enabled)*

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2012 Balboa Water Group.

BP2100 Configuration Options

Time Features

Feature	Default
Time Format*	24 Hour
Filter 1 Start Hour*	20:00 (8:00 PM)
Filter 1 Duration*	2 Hours
Filter Cycle 2 Default*	OFF
Filter 2 Start Hour*	08:00 (8:00 AM)
Filter 2 Duration*	15 Minutes
Light Cycle	Disabled
Light Cycle Default*	OFF
Light Cycle Start Hour*	21:00 (9:00 PM)
Light Cycle Duration*	15 Minutes
Cooling Time A	1 Minute
Cooling Time B	5 Minutes

**May be changed by end-user (if enabled)*

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.

© Copyright 2012 Balboa Water Group.

BP2100 Configuration Options

Reminder Features

Feature	Default
Reminders Shown*	<i>Yes</i>
Check pH	<i>OFF</i>
Check Sanitizer	<i>OFF</i>
Clean Filter	30 Days
Test GFCI	<i>65 Days</i>
Drain Water	<i>100 Days</i>
Change Cartridge	OFF
Clean Cover	<i>OFF</i>
Treat Wood	<i>OFF</i>
Change Filter	365 Days

*May be changed by end-user (if enabled)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.

© Copyright 2012 Balboa Water Group.

BP2100 Configuration Options

Special Features

Feature	Default
Special Amperage Rule A	No Limitation
Special Amperage Rule B	3 high-speed pumps max. Blower turns off with 3 high speed pumps
Drain Mode	Disabled
Demo Mode	Disabled
GFCI Trip	Not Applicable for CE Models
Ozone Slaved to Heater Pump	<i>Yes in circ setups</i> <i>No in non-circ setups</i>
Dual Voltage Heater	Always Input Voltage
Safety Suction	Disabled

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2012 Balboa Water Group.

TP600 Panel Configuration

Button Layout Table

Button #	Setups 1 - 8
1	Jets 1
2	Jets 2
3	Jets 3
4	Temperature
5	Light 1
6	Jets 4
LED 1	Jets 1
LED 2	Jets 2
LED 3	Light 1
LED 4	Heat On



In all Setups, the button labeled "AUX" on overlay 13579 (shown below) controls Jets 4.

In Setups 2, 4, 7 (which have a Blower), an AX10A3 auxiliary panel plugged into J5 (Bank 1) must be used to control the Blower.



Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.

© Copyright 2012 Balboa Water Group.

TP800 Panel Configuration

Button Layout Table

Feature #	Blower & Circ Setups 2 & 4	NO Blower & Circ Setups 1, 3, & 5	Blower & No Circ Setup 7	NO Blower & No Circ Setups 6 & 8
A1	N/A	N/A	N/A	N/A
A2	Jets 1	Jets 1	Jets 1	Jets 1
A3	Jets 2	Jets 2	Jets 2	Jets 2
A4	Jets 3	Jets 3	Jets 3	Jets 3
A5	Jets 4	Jets 4	Jets 4	Jets 4
A6	Blower	Light 1	Blower	Light 1
A7	Light 1	Invert	Light 1	Invert
A8	Invert	(Circ Icon)	Invert	Undefined
A9	(Circ Icon)	Undefined	Undefined	Undefined
A10	Undefined	Undefined	Undefined	Undefined
A11	N/A	N/A	N/A	N/A
A12	N/A	N/A	N/A	N/A
A13	Jets 1	Jets 1	Jets 1	Jets 1
A14	Jets 2	Jets 2	Jets 2	Jets 2
A15	Jet 3	Jet 3	Jet 3	Jet 3
A16	Jet 4	Jet 4	Jet 4	Jet 4
B1	Jets 1	Jets 1	Jets 1	Jets 1
B2	Jets 2	Jets 2	Jets 2	Jets 2
B3	Blower	Jets 3	Blower	Jets 3
B4	Light 1	Light 1	Light 1	Light 1

Overlay Part Number 12512.




Button labeled "AUX" controls Blower in Setups 2, 4, & 7, and controls Jets 3 in all other Setups.

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.


© Copyright 2012 Balboa Water Group.

TP800 Panel Configuration

Spa Screen

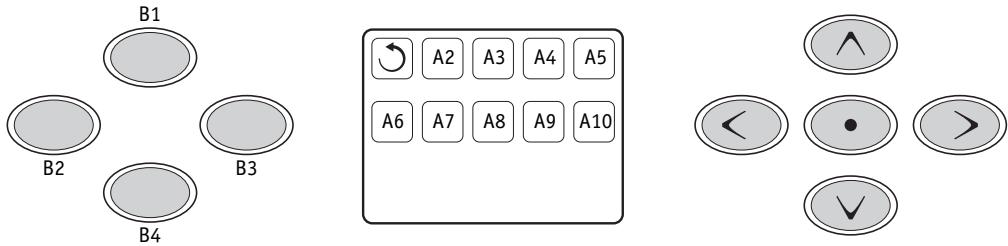

Shortcuts Screen

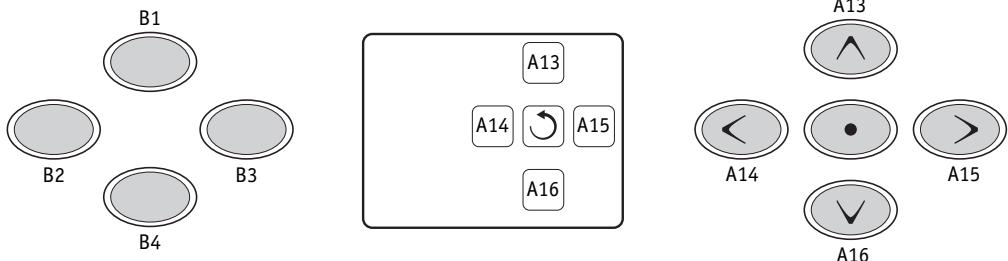

Note: Buttons 11 and 12 are not used in this configuration.

Button 1 is fixed.

A Circ Icon will appear when a Circ Pump is configured.

TP900 Panel Configuration

Button Layout Table


Feature #	Blower & Circ Setups 2 & 4	NO Blower & Circ Setups 1, 3, & 5	Blower & No Circ Setup 7	NO Blower & No Circ Setups 6 & 8
A1	N/A	N/A	N/A	N/A
A2	Jets 1	Jets 1	Jets 1	Jets 1
A3	Jets 2	Jets 2	Jets 2	Jets 2
A4	Jets 3	Jets 3	Jets 3	Jets 3
A5	Jets 4	Jets 4	Jets 4	Jets 4
A6	Blower	Light 1	Blower	Light 1
A7	Light 1	Invert	Light 1	Invert
A8	Invert	(Circ Icon)	Invert	Undefined
A9	(Circ Icon)	Undefined	Undefined	Undefined
A10	Undefined	Undefined	Undefined	Undefined
11	N/A	N/A	N/A	N/A
12	N/A	N/A	N/A	N/A
13	Jets 1	Jets 1	Jets 1	Jets 1
14	Jets 2	Jets 2	Jets 2	Jets 2
15	Jets 3	Jets 3	Jets 3	Jets 3
16	Jet 4	Jet 4	Jet 4	Jet 4

A *Circ* Icon will appear when a Circ Pump is configured.

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.

© Copyright 2012 Balboa Water Group.

TP900 Panel Configuration

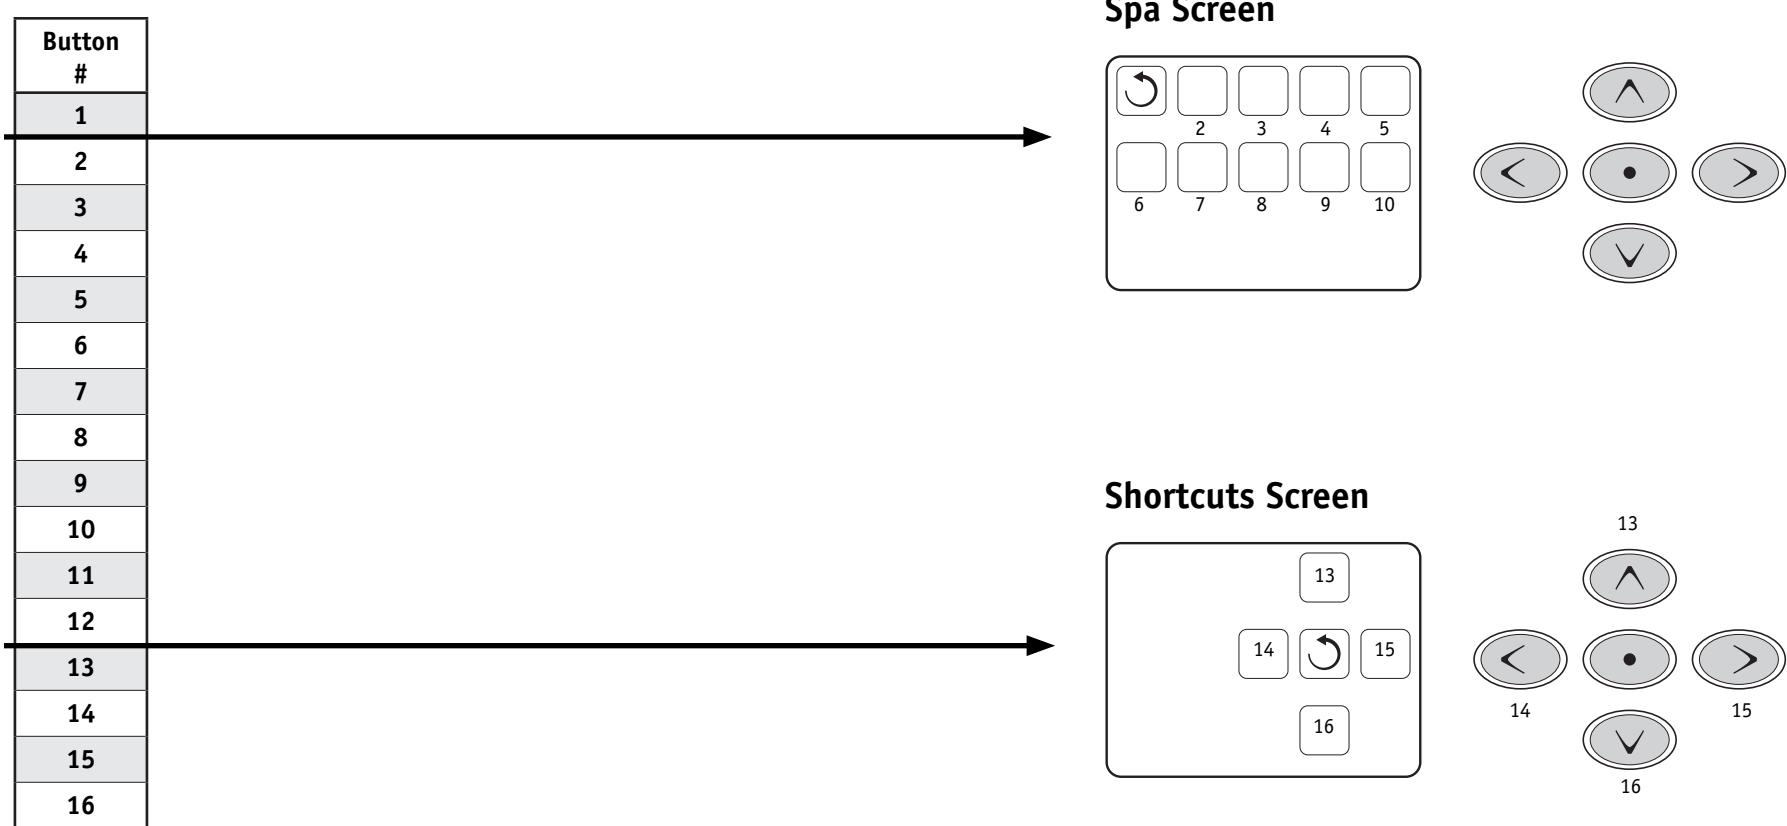

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.

© Copyright 2012 Balboa Water Group.

BP2100 Configuration Options

Auxiliary Panel Features on Bank 1*

Feature	Default
Aux Button A1	Jets 1
Aux Button A2	Jets 2
Aux Button A3	Blower
Aux Button A4	Light

Auxiliary Panel Features on Bank 2*

Feature	Default
Aux Button A5	Jets 1
Aux Button A6	Jets 2
Aux Button A7	Jets 3
Aux Button A8	<i>Jets 4</i>

Buttons that are assigned to equipment that is not defined in a Setup will not do anything in that Setup.

*Bank 1 consists of J5 on the Main Circuit Board.

Bank 2 consists of J8 on the Main Circuit Board.


Aux Connection Splitter PN 25257 may be required.

BP2100 Configuration Options

Auxiliary Panel Features

AX10 Panels on Bank 1*

A1, AX10A1	No O/L	52803
A2, AX10A2	No O/L	52804
A3, AX10A3	No O/L	52805 ►
A4, AX10A4	No O/L	52806



Call Customer Service for
additional information about Auxiliary Panels.

AX10 Panels on Bank 2*

A5, AX10A1	No O/L	52803
A6, AX10A2	No O/L	52804
A7, AX10A3	No O/L	52805
A8, AX10A4	No O/L	52806


*Bank 1 consists of J5 on the Main Circuit Board.

Bank 2 consists of J8 on the Main Circuit Board.

Aux Connection Splitter PN 25257 may be required.

AX20

AX20 A1A2	No O/L	52800
AX20 A1A3	No O/L	52801
AX20 A1A4	No O/L	52802

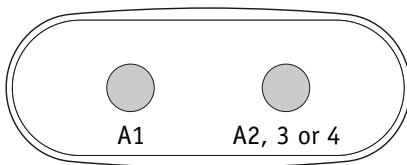


AX20 Auxiliary Panel plugged into Bank 1 will operate A1 + A2, A3 or A4.

AX20 Auxiliary Panel plugged into Bank 2 will operate A5 + A6, A7 or A8.

AX40

AX40	No O/L	52799
------	--------	-------

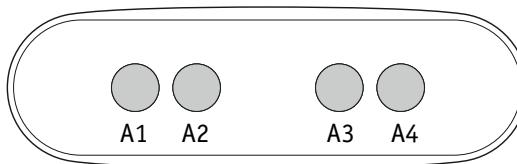

AX40 Auxiliary Panel plugged into Bank 1 will operate A1 + A2, A3 and A4.

AX40 Auxiliary Panel plugged into Bank 2 will operate A5 + A6, A7 and A8.


Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.

© Copyright 2012 Balboa Water Group.

BP2100 Configuration Options

Remote Panel Features

Feature	Default
Remote Button A1	Jets 1
Remote Button A2	Jets 2
Remote Button A3	<i>Undefined</i>
Remote Button A4	<i>Jets 3</i>
Remote Button A5	<i>Jets 4</i>
Remote Button A6	Undefined
Remote Button A7	Undefined
Remote Button A8	Undefined



Buttons that are assigned to equipment that is not defined in a Setup will not do anything in that Setup.

Remote Panel Part Number _____
Overlay Part Number _____

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2012 Balboa Water Group.